



FEATURES

- Oil lubricated rotary vane vacuum pump, nominal speed 20 m³/h;
- Vacuum level control through high precision absolute-type vacuum sensor, which does not require calibration;
- Maximum vacuum 99,8% (2 millibar);
- 410 mm sealing bar, easily removable for cleaning;
- Standard inert gas injection with 2 nozzles; the "Gasplus" system allows to reach percentages of inert gas volume equal to 90% of the vacuum chamber, allowing the packaging of products extremely sensitive to crushing;
- Brilliant stainless steel vacuum chamber with constant thickness, easy to clean being free of edges and receptacles;
- 10 editable user programs;
- 1 cycle for vacuum containers;
- "H2Out" pump oil dehumidification cycle;
- Resettable oil change alarm;
- Menu accessible to technical assistance for parameter adjustment and reading of cycles carried out;
- Waterproof control panel, resistant to liquids, humidity, dirt and dust;
- Electronic control and power cards protected from moisture and dirt by fireproof plastic covers;
- High-thickness PMMA (Plexiglass) lid with polished and rounded edges; opens automatically at the end of the cycle;
- Lowering system of the lid at the end of the work in the rest position by releasing the rear gas spring, which allows to release the tension on the gas spring and on the lid;
- Access for easy maintenance through front opening of the casing;
- Standard "Easy" accessory for external vacuum in embossed bags;
- 2 PE-filling plates for product adjustment and cycle speed up.

DESCRIPTION

The models of the Lerica C-Series line are characterized by simplicity of use and versatility, which make them ideal work tools in any professional environment. Made entirely of AISI304 stainless steel, they stand out for the digital control panel, the absolute vacuum sensor and the inert gas injection, possible up to 90% of the vacuum chamber volume thanks to the "Gasplus"-device. Easy maintenance and cleaning are facilitated by the front opening of the machine body and the brilliant, rounded surfaces of the vacuum chamber.

SEALING BAR 410mm
VACUUM PUMP 20 m³/h
SENSOR CONTROL


ACCESSORIES

- Bags for storage, cooking and "cook & chill"; embossed bags;
- Stainless steel cart with castors and shelf;
- Inclined stainless steel plate for liquid packing;
- Suction device for external containers.



| | | |
|---------|------|----------|
| PROJECT | DATE | APPROVED |
| ITEM | QTY | |

VACUUM PACKAGING MACHINES C420

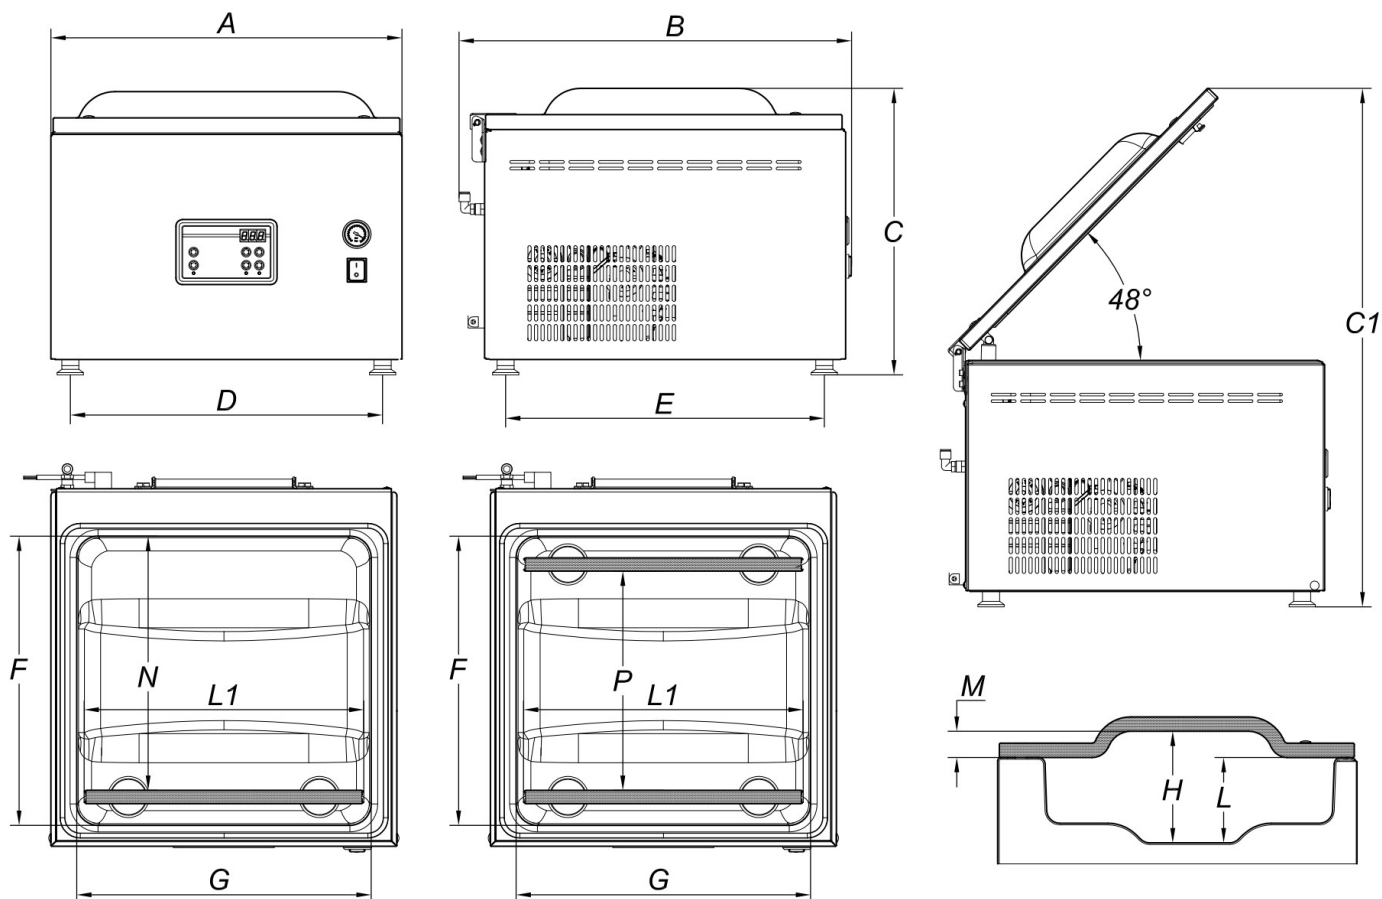

SPECIFICATIONS

| | | |
|---|-------------------|---------------------------------------|
| Length of seal L1 | mm | 410 |
| Length Of Seal L2 | mm | 410 |
| Nominal pump speed | m ³ /h | 20 |
| Final pressure | mbar | 2 |
| Chamber Size (FxGxH) | mm | 440x448x170 |
| Useful space Chamber (N) | mm | 387 |
| Useful space Chamber (P) | mm | 334 |
| Chamber depth (L) | mm | 130 |
| Chamber volume | Lt | 29,5 |
| Power | W | 700 |
| Electrical voltage/Frequency/Phases | V/Hz | 220-240V / 50-60Hz / 1Ph+N+PE |
| Power cord and plug | | 3m + IEC / Schuko |
| Current | A | 3,04 |
| Housing materials | | Stainless steel (AISI304) |
| Vacuum chamber material | | Hydroformed stainless steel (AISI304) |
| Lid material | | PMMA (plexiglas) |
| Overall dimensions (AxBxC) | mm | 535x598x436 |
| Maximum height with open lid (C1) | mm | 790 |
| Distance between supports (DxE) | mm | 476x485 |
| Weight (with shelves) | kg | 59 (1B) / 63 (2B) |
| Noise level | dB(A) | 64 |
| Environmental operating temperature (min-max) | °C | 12-40 |